


technical specifications

Product Name	Grade
Product Description	Textured Loop Pile
Pile Yarn Description	100% Solution Dyed Nylon (Polyamide-PA)
Tile Dimensions	50 cm x 50 cm, 25 cm x 100 cm
Pile Yarn Weight	620g/m ² +/-10%
Total Weight	4100g/m ² +/-10%
Pile Height	3.5mm +/-10%
Total Thickness	6mm +/-10%
Gauge/ends per 10cm	1/10 th - 62 stitches
Tufts per m² / Pile Density	235,800/m ² +/-10%
Backing Description	Accummen™, 75% recycled
Wear Classification	BS EN 1307 Heavy Commercial Use Class 33
Luxury Rating Class	LC1
Flammability	Euroclass Bfl-s1
Castor Chair Rating	BS EN 985 Pass - suitable for continuous use
Hexapod	BS ISO 10361: Method B:2000 3 to 4
Static Loading	BS 4939:1987 (2003) Recovery >80% (24hrs)
Dynamic Loading	BS ISO 2094:1999 (2005) Loss <20% (1000 impacts)
Body Voltage Test	BS ISO 6356:2000 <2kV
Colour Fastness To Light	BS EN ISO 105 - B02 Minimum Grade 6
Colour Fastness To Shampoo	BS 1006:UK-TB: 1990 Minimum Grade 4-5
Reduction in Impact Noise	BS EN 140-8: Part 8: 1998 21dB
Reduction in Impact Noise at 1000Hz	BS EN 140-8 Part 8: 1998 31.8dB
Number Of Tiles Per Box	20 (5m ²)

For best results we recommend*

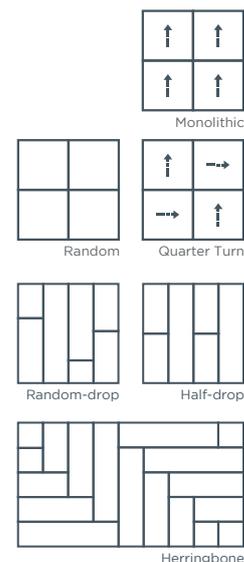

*All tiles within these designs are unique and any linear aspects may not match from one tile to the next



This floor covering was made with renewable electricity



Environmental Profiles Scheme
Certificate Number ENP353



Certificate Number FM01440
BS EN ISO 9001:2008



Statement on level of emission of volatile substances in indoor air posing a toxic threat during inhaling - on a scale from A+ (very low-emission) to C (high-emission)

environmental information

- Burmatex products achieve either A or A+ across all the BREEAM defined building applications
For specific rating, please refer to www.breeam.co.uk
- Burmatex products qualify for SKA as they achieve one or more requested criteria
- All Burmatex carpet/carpet tile/carpet plank ranges are made at its single UK manufacturing site
- Wherever possible, raw materials including yarn/fibre are sourced locally i.e. within 20 miles
- Over 75% of Burmatex Accummen™ backing comes from recycled materials
- Continuous assessment and improvement of manufacturing process to minimise use of raw materials/power
- All manufacturing waste is recycled and all electricity used is from renewable resources
- All Burmatex products are heavy contract with a 10 year guarantee for maximum useful life
- Certified, Class A+: very-low VOC Emission

LEED® v4 - Burmatex products can contribute towards satisfying the following credits for LEED v4: NC-v4/CI-v4 MRc2/MRc3 (Building product disclosure and optimization - environmental product declarations), MRc3/MRc4 (Building product disclosure and optimization - sourcing of raw materials), EQc1 (Enhanced indoor air quality strategies), EQc2 (Low-emitting materials), EQc6 (Interior lighting - Option 2. Lighting quality (E - H)) and EQc9 (Acoustic Performance). Products are not reviewed under LEED. LEED credit requirements cover the performance of materials in aggregate, not the performance of individual products or brands. For more information on LEED, visit www.usgbc.org/contact

Burmatex Ltd
Victoria Mills, The Green
Ossett, West Yorkshire
WF5 0AN
United Kingdom

T +44 (0) 1924 262 525
F +44 (0) 1924 280 033
UK email: projects@burmatex.co.uk
International email: international@burmatex.co.uk
www.burmatex.co.uk

Burmatex reserves the right to improve the specification of all products without prior notification. E&OE
Burmatex carpets, carpet tiles and carpet planks should be installed and used in full accordance with instructions at www.burmatex.co.uk and recognised trade standards. Orders are subject to Burmatex terms and conditions of sale. See: www.burmatex.co.uk

LRV values for **grade**

Product code tiles	Product code planks	Product colour name	CIE Y	CIE L
21501	22501	silver	15.51	46.32
21502	22502	denim	4.10	24.01
21503	22503	indigo	3.19	20.79
21504	22504	ruby	3.11	20.49
21505	22505	crater	3.19	20.78
21506	22506	purple	3.78	22.93
21507	22507	abyss	2.55	18.13
21508	22508	zinc	6.12	29.71
21509	22509	smoke	10.35	38.47